




STANDARD STEEL AXLES

For economy and serviceability, Azusa Standard Axles are the ones to use. They have two 1/4" keyways, 180° offset, 3/4-16 threads, three types of ends and seven different lengths. Plated and poly-wrapped for protection.




	AXLE DIA.	OVERALL LENGTH	SHOULDER TO SHOULDER	PART
Standard End (2') (thread length 1-3/8')	1"	34'	30'	1401-34
	1"	36'	32'	1401-36
	1"	38'	34'	1401-38
	1"	40'	36'	1401-40
	1"	42'	38'	1401-42
	1"	44'	40'	1401-44
	1"	54'	50'	1401-54
Short End (1-1/2') (thread length 1-1/8')	1"	36'	33'	1402-36
	1"	38'	35'	1402-38
	1"	40'	37'	1402-40
	1"	42'	39'	1402-42
Snap Ring End (no step) <i>(Snap Rings Included; for Snap Ring part nos., see page 49)</i>	1"	30'	30'	1403-30
	1"	38'	38'	1403-38
	1"	40'	40'	1403-40


- Brightly Plated*
- Offset Keyways*
- Stepped-Down Threaded Ends or Snap Ring Grooves*
- One Inch or 25mm Diameter*
- Flexpruf Steel or Standard Steel*

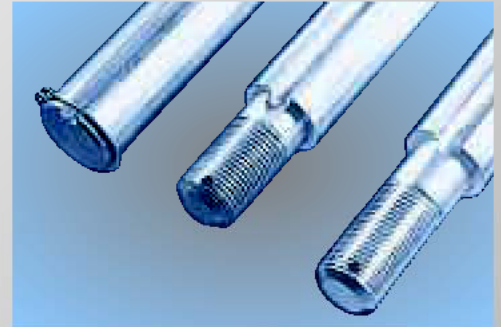

DELUXE FLEXPURF STEEL AXLES

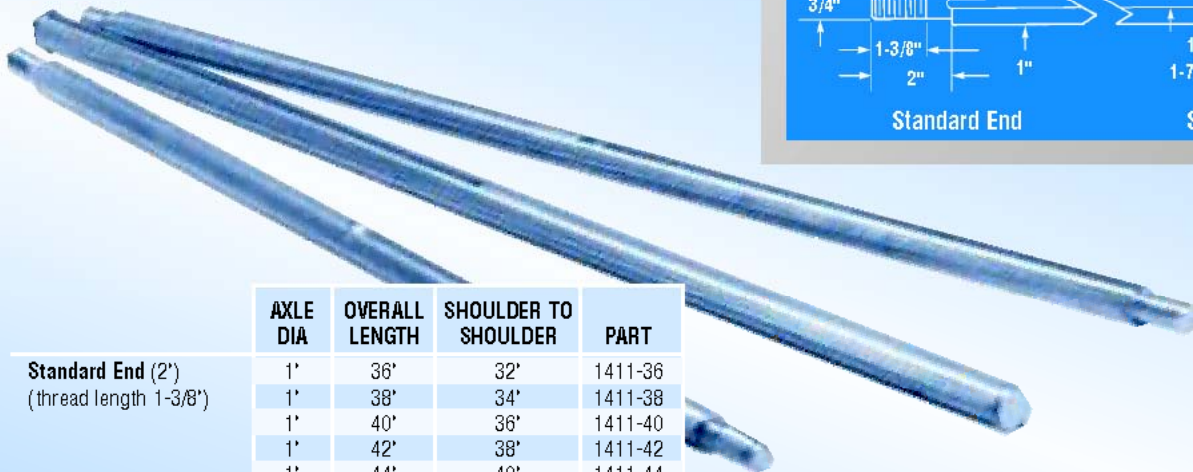

	AXLE DIA.	OVERALL LENGTH	SHOULDER TO SHOULDER	PART
Standard End (2') (thread length 1-3/8')	1"	36'	32'	1411-36
	1"	38'	34'	1411-38
	1"	40'	36'	1411-40
	1"	42'	38'	1411-42
	1"	44'	40'	1411-44
Short End (1-1/2') (thread length 1-1/8')	1"	36'	33'	1412-36
	1"	38'	35'	1412-38
	1"	40'	37'	1412-40
Snap Ring End (no step) <i>(Snap Rings Included; for Snap Ring part nos., see page 49)</i>	25mm	40'	40'	1414-40
	1"	40'	40'	1413-40

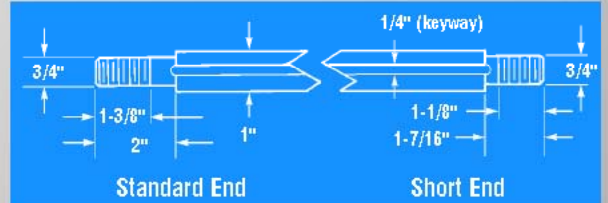

We have selected an extremely tough steel for our high quality Deluxe Flexpruf Axles. The ends step down from 1" to 3/4" and have a 3/4-16 thread. Two keyways (1/4") are offset 180° for stress relief, balance and unrestricted positioning of brakes, bearings and hubs. Ends are drilled for your cotter pins or safety wire. Plated and poly-wrapped for protection.

Click For Index