



JIG-WELDED SPINDLES – 5/8" KINGPIN

- ✓ Bushings, Spacers & Locknuts Included in Kits
- ✓ Two Axle Diameters – 5/8" & 3/4"
- ✓ Jig-Welded for Uniformity
- ✓ Choice of Lengths




The individual assemblies in a spindle set are designated as "Side 1" and "Side 2." This indicates that one is the "mirror image" of the other to produce a set, no matter how the assemblies are oriented.

SPINDLE & BRACKET SET				SPINDLE ONLY	
SIDE 1	SIDE 2	AXLE	LENGTH	SIDE 1	SIDE 2
2204	2205	5/8"	3.75'	2206	2207
2235	2236	5/8"	4.50'	2237	2238
2512	2513	5/8"	6.00'	2514	2515
2200	2201	3/4"	3.75'	2202	2203
2231	2232	3/4"	4.50'	2233	2234
2516	2517	3/4"	6.00'	2518	2519

Unwelded Components Available. See page 35.

DIMENSIONAL DIAGRAMS

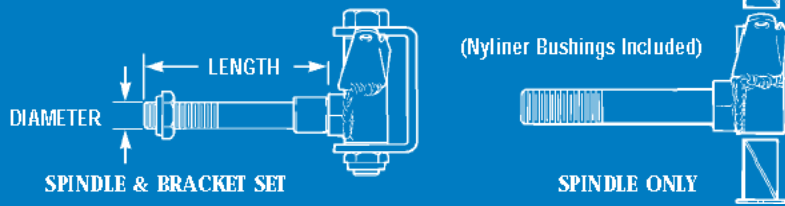

SPINDLE HARDWARE



COMMON TO 5/8" & 3/4" SPINDLE SETS	PART
Spindle Bracket 5/8" holes	8171
Kingpin Bolt 5/8-18 x 3.25'	8447
Kingpin Nut 5/8-18 Nylon Insert Locknut	8515
Nyliner Bushings (2 required)	8215
5/8" SPINDLE AXLE	PART
Nylon Spacer 5/8" ID	8328
Nylon Insert Locknut 5/8-18	8515
3/4" SPINDLE AXLE	PART
Nylon Spacer 3/4" ID	8329
Nylon Insert Locknut 3/4-16	8516

SPINDLE BRACKET FOR 1/2" KINGPIN



For Spindle Bracket dimensions, see page 36

COMPONENTS	PART
Spindle Bracket For 1/2" Kingpin	8181
Kingpin Bolt 1/2-20 x 3.75'	8446
Locknut - 1/2-20	8514